

BB LEDlightpipe EVO Arrow Danderyds parkeringshus R1

Technical specifications:

Input voltage: 220-240 Vac
 Power max: 155 or 75 W maximum
 Frequency: 50/60 Hz
 Dimming: DALI / 0-10V

Dust/Waterprotection: IP66
 Impact protection: IK10+
 Insulationclass: Class I
 Powerfactor: 0,98 (100%), 0,85 (20%)

Colortemperature: 4000-5000K
 Colorrendering (Ra): >70

LEDtype: NICHIA 229 series (ceramic, high power)
 LED arrangement: No parallel circuits
 Ambient temperature: -40°C / +40°C



Standards:

EN 60598-1, EN 60598-2-2, EN 55015, EN 61000-3-2

Material specifications:

Luminaire parts; extruded anodized aluminum
 Polycarbonate tube, wallthickness 2mm
 Fixing: Stainless steel bracket

Lightdistribution:

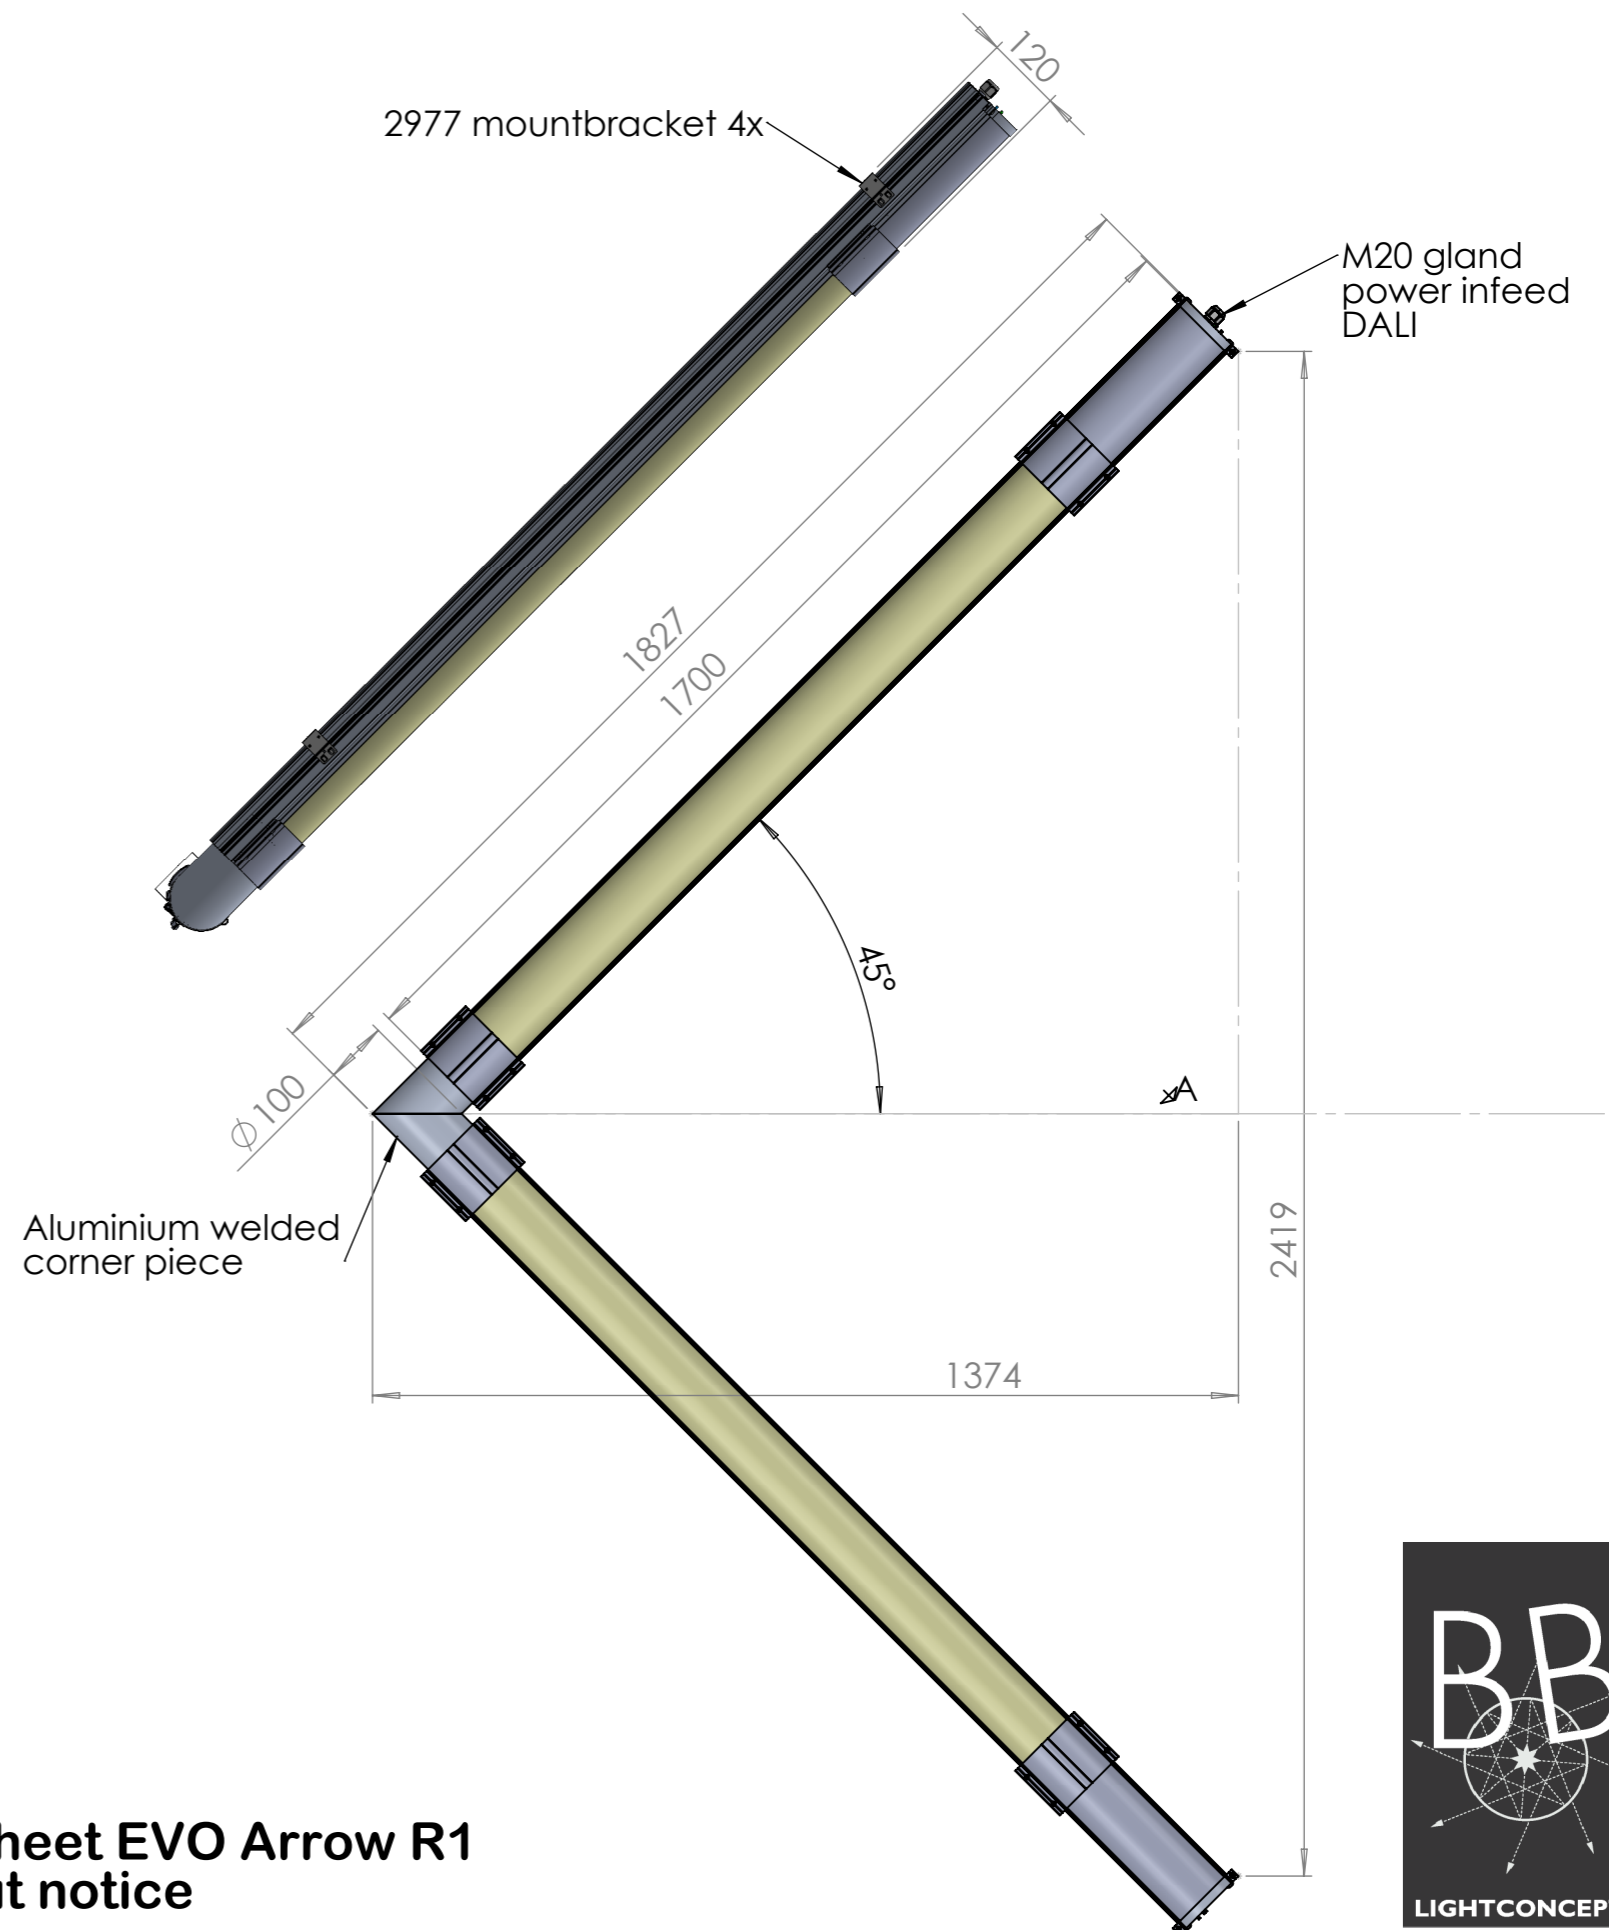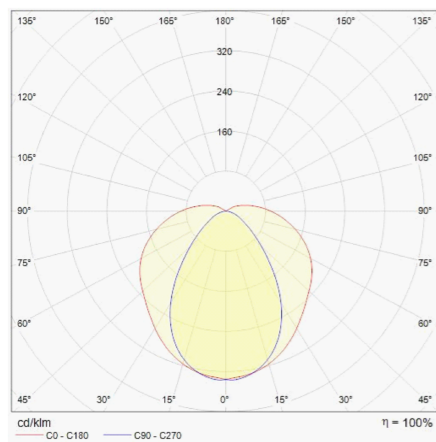

2017 BB Lightconcepts datasheet EVO Arrow R1
 Subject to change without notice

